

# UL1015 Flat Cable


# Flat Ribbon Wire 并排线

## ■ 产品描述

- 额定温度: 80°C/90°C/105°C
- 额定电压: 600V/750V
- 导体: 单支或绞合 30~16AWG 镀锡或裸铜
- 绝缘: 聚氯乙烯 (PVC)
- 阻燃等级: VW-1及CSAFT1、FT2
- 参考标准: UL758 UL1581 UL2556
- 适用范围:
- 用于一般电子、电器设备内部连接线

## ■ PRODUCT DESCRIPTION

- Rate temperature: 80°C/90°C/105°C
- Rate voltage: 600V/750V
- Conductor: 30~16AWG (Solid or stranded, tinned or bare copper)
- Insulation: PVC
- Flame test: VW-1&CSAFT1、FT2
- Reference standard: UL758 UL1581 UL2556
- Application: For internal wiring of electronic and electrical equipment

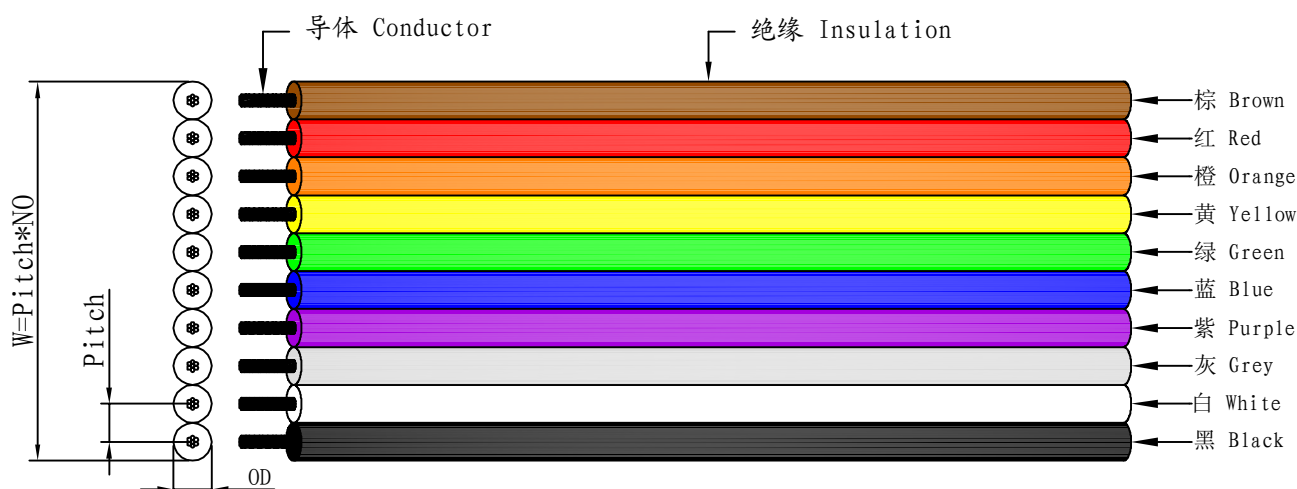

## ■ 印字 MARKING

每芯印字 Each core marking

UL AWM 1015 ( )AWG 105° C 300V VW-1 E332441 YAobo cUL AWM I A 105° C 300V FT1

## ■ 产品结构 CABLE CONSTRUCTION



导体 CONDUCTOR					绝缘 INSULATION		最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC)	标准长度 STANDARD PUT-UP	
规格 AWG	间距 Pitch (mm)	构造 CONSTRUCTION (No. /mm)	外径 DIA. (mm)	芯数 (No)	厚度 THICKNESS (mm)	外径 OD (mm)		英制 Ft/Ro11	公制 M/Ro11
30	1.90	7/0.1	0.30	2-30	0.80	1.90	1000	305	
28	2.00	7/0.127	0.39	2-30		2.00	1000	305	
26	2.10	7/0.16	0.49	2-30		2.10	1000	305	
24	2.20	11/0.16	0.61	2-30		2.20	1000	305	
22	2.35	17/0.16	0.76	2-20		2.35	1000	305	
20	2.55	21/0.178	0.94	2-20		2.55	1000	305	
18	2.80	34/0.178	1.20	2-10		2.80	1000	305	
16	3.10	26/0.254	1.50	2-10		3.10	1000	305	