


# UL2468

## Flat Ribbon Cable

### PRODUCT DESCRIPTION

80	Rate temperature 80
300V	Rate voltage 300V
30 16AWG	Conductor 30 16AWG Solid or stranded, tinned or bare copper
PVC	Insulation PVC
VW1 CSAFT1 FT2	Flame test VW1&CSAFT1 FT2
UL758 UL1581 UL2556	Reference standard UL758 UL1581 UL2556
:	Application: For internal wiring of electronic and electrical equipment

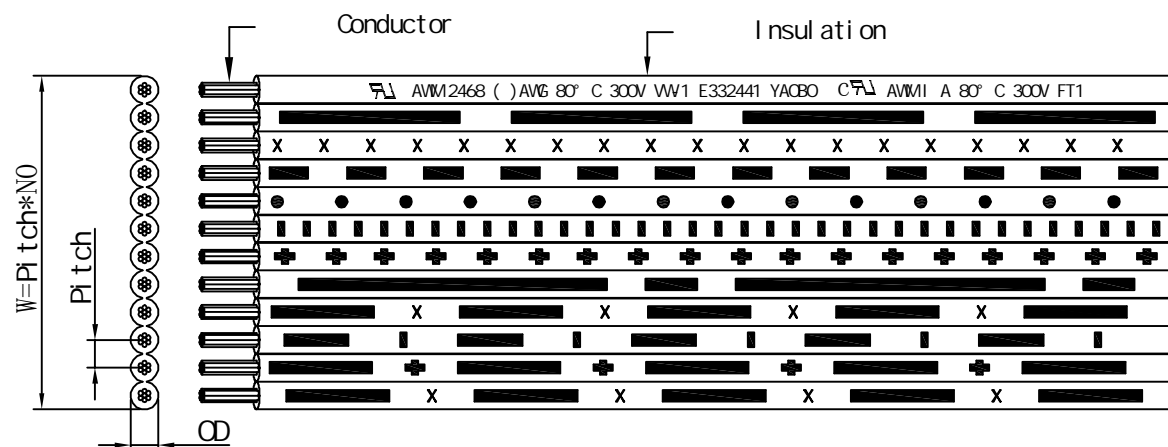

MARKING

AWM 2468 ( )AWG 80° C 300V VW-1 E332441 YAobo cAWM I A 80° C 300V FT1

### CABLE CONSTRUCTION



CONDUCTOR					INSULATION		MAX. COND. RESISTANCE /km <sup>20</sup> , DC	STANDARD PUT-UP	
AWG	Pitch (mm)	CONSTRUCTION (Nb./mm)	DI A (mm)	(Nb)	THICKNESS mm	OD*W (mm)		Ft/Roll	M/Roll
28	1.3	7/0.127	0.39	2	0.45	1.30*2.60	237.25	2000	610
				3		1.30*3.90		1000	305
				4		1.30*4.20		1000	305
				5		1.30*7.50		1000	305
				6		1.30*7.80		1000	305
				7		1.30*9.10		1000	305
				8		1.30*10.40		1000	305
				9		1.30*11.70		1000	305
				10		1.30*13.0		1000	305
				11		1.30*14.30		1000	305
				12		1.30*15.60		1000	305

26	1.5	7/Q.16	0.49	2	0.46	1.40*3.0	148.94	1000	305
				3		1.40*4.50		1000	305
				4		1.40*6.0		1000	305
				5		1.40*7.50		1000	305
				6		1.40*9.0		1000	305
				7		1.40*10.50		1000	305
				8		1.40*12.0		1000	305
				9		1.40*13.50		1000	305
				10		1.40*15.0		1000	305
				11		1.40*16.50		1000	305
				12		1.40*18.0		1000	305
				24		1.5		11/Q.16	0.61
3	1.50*4.50	1000	305						
4	1.50*6.00	1000	305						
5	1.50*7.50	1000	305						
6	1.50*9.0	1000	305						
7	1.50*10.50	1000	305						
8	1.50*12.0	1000	305						
9	1.50*13.50	1000	305						
10	1.50*15.00	1000	305						
11	1.50*16.50	1000	305						
12	1.50*18.00	1000	305						
22	1.7	17/Q.16	0.76		2		0.47		
				3	1.70*5.10	1000		305	
				4	1.70*6.80	1000		305	
				5	1.70*8.50	1000		305	
				6	1.70*10.20	1000		305	
				7	1.70*11.90	1000		305	
				8	1.70*13.60	1000		305	
				9	1.70*15.30	1000		305	
				10	1.70*17.00	1000		305	
				11	1.70*18.70	1000		305	
				12	1.70*20.40	1000		305	